


FOR INDUSTRIAL AND INSTITUTIONAL USE



1210 FIRST BASE ACRYLIC FLOOR SEALER

Vinyl
Vinyl Asbestos
Asphalt
Linoleum
Rubber
Concrete

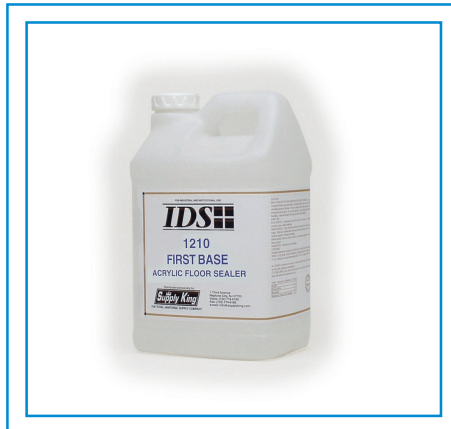

Flagstone
Brick
Terrazzo
Marble
Sealed Wood
Quarry Tile

Requires no authorization for use in U.S.D.A. offices and non-processing areas.

Product Description

An all-acrylic floor sealer formulated to provide a hard, durable undercoat for use prior to the application of any floor polish. Never yellows and will continue to protect your floor after all floor finish or wax has worn off.

This product meets the maximum content requirements for Volatile Organic Compounds (VOCs) as established by state and Federal regulations.

Test:

Limit:

Type:	Modified acrylic
Non-volatile Solids:	18.0 ± 0.5%
Color:	Milky white
Odor:	Mild
pH:	8.5 - 9.0
Dry/Recoat Time:	30 minutes
Slip Resistance:	.56 - .60 (ASTM-D2047-82)
Gloss:	Greater than 88
Leveling:	Excellent
Sediment:	0.1% by volume, max.
Removability:	With conventional strippers
Detergent Resistance:	Excellent
Stain Resistance:	Good
Chemical Resistance:	Good
VOC Content:	0.31 lbs./gal.
Storage/Stability:	2 years
Freeze / Thaw Stability:	Keep from freezing
Weight Per Gallon:	8.56 lbs./gal.
Coverage:	
1st coat:	1000-1500 ft ² per gal.
2nd coat:	1500-2000 ft ² per gal.

Directions For Use

Make sure floor has been thoroughly stripped and rinsed and allowed to dry. For porous or well-worn floors, apply 2 coats of sealer followed by 2 or more coats of finish depending on the gloss desired.

On new floor or floors in good condition, one coat of sealer should suffice. For use as a finish on terrazzo, flagstone, brick, quarry tile, or concrete, apply as many coats as necessary to achieve the desired gloss.

FOR INDUSTRIAL AND INSTITUTIONAL USE



Supply King

1 Third Avenue, Neptune City, NJ 07753 • Voice: (732) 774-6100 - Fax: (732) 774-6186 - e-mail: info@supplyking.com